

## Loose nails Square shank – Bright Basic



**Document No:** CE\_DOP\_NLS\_LB\_01

for structural timber products

**Finishing information:**

Bright Basic

for Service Class 1 – according to EN 1995 – 1 – 1

**Nail Dimensions:**

Diameter: from 2,3 to 3,8 mm

Length: from 55 to 125 mm

**Properties of the material used:**

- non alloy wire rod in accordance with EN 10016-1 to 4
- tensile strength in accordance with EN 10218-1, min. 700 N/mm<sup>2</sup>

Any and all of the nails covered by this Declaration of Performance are identical to the nails that the ITTs were originally issued for. Neither the geometrical specification, raw wire or production process have undergone any changes that would affect the relevant properties of the nail according to 14592:2008+A1:2012, e.g. characteristic withdrawal parameter  $f_{ax,k}$ , head pull-through parameter  $f_{head,k}$ , characteristic yield moment  $M_{y,k}$  or corrosion protection as declared in the first place.

**The manufacturer declares for**

**Loose nails in Square shank from 2,3 diameter to 3,8 mm:**

a) That the product has been manufactured in accordance with EN 14592:2008+A1:2012 "Timber Structures – Dowel-type fasteners – Requirements".

b) Initial Type Testing has been performed to identify and confirm essential characteristic values in accordance with table ZA.1 in EN 14592. Those characteristic values are indicated together with the CE mark on product labels and in the table here below.

c) Initial Type Testing was performed by VHT notified body 1503

ITT Report No: PB-641-12-sq-2.3bk-130322-La

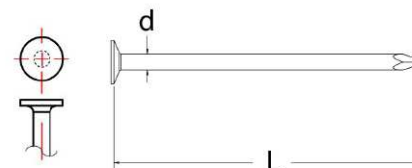
ITT Report No: PB-641-12-sq-3.4bk-130307-La







ITT Report No: PB-641-12-sq-2.6hd-130322-La

ITT Report No: Err:508

ITT Report No: PB-641-12-sq-3.0bk-130307-La

d) Assessment and verification of constancy of performance is in compliance with System 3.



ARTICLE	NOMINAL DIAMETER d (mm)	NOMINAL LENGTH L (mm)	HEAD AREA A <sub>h</sub> (mm <sup>2</sup> )		Withdrawal Parameter $f_{ax,k}$ (N/mm <sup>2</sup> ) *		Head Pull Trough Parameter $f_{head,k}$ (N/mm <sup>2</sup> ) *		Yield Moment $M_{y,k}$ (Nmm)
					EN 1995 – 1 – 1		EN 1995 – 1 – 1		EN 1995 – 1 – 1
NLS23/55LB	2,3	55	23,8		2,45		8,58		3501
NLS26/60LB	2,6	60	28,3		2,45		8,58		4387
NLS30/75LB	3,0	75	37,4		2,45		8,58		6612
NLS34/95LB	3,4	95	47,8		2,45		8,58		9169
NLS34/100LB		100	47,8		2,45		8,58		9169
NLS38/125LB	3,8	125	#N/D		#N/D		#N/D		#N/D

\*calculated in wood with a characteristic density of 350 kg/m<sup>3</sup>

2013 July 1st, Casalecchio di Reno

Marketing Manager, Valentina Ratti

